

# R2 PLUS L

## POWERFUL PERFORMANCES

### PERFORMANCES GUARANTEED

High accuracy and long reflectorless range are the perfect combination that makes STONEX R2 Plus L the best friend of every professional surveyor.

### ADVANCED ONBOARD FIELD APPLICATION PROGRAMS

Whether the work is a basic survey or a long road staking out under full sun, STONEX R2 Plus L will always help you with a friendly user interface and its new powerful and intuitive field software. The integrated onboard software represents a real complete suite of application programs such as COGO and Construction, very useful to surveyors and civil engineers. Moreover, the navigation menu drives the user into simple operations, and the results are displayed in a clear way. The large LCD display, of the same dimension on both sides of the Total Station, guides the Surveyor quickly to the right solution.


### WIDE RANGE OF SCALABLE SOLUTIONS

Cadastral, mapping, staking out, and up to high precision monitoring works: within the range of R2 Plus L Series, you will find the solution that fits your needs. R2 Plus L comes standard with the integrated onboard field software and an external controllers can be linked to STONEX R2 Plus L, through the Bluetooth™ wireless connection: no limitation will stop your working process. Two dimensional road software module is included as standard in each STONEX R2 Plus L.


### MEASURE THE RIGHT POINTS

Measuring height of cables and buildings corners is not problems with R2 Plus L: its laser is designed to measure long distances with high accuracy. The 2 mm ± 2 ppm EDM on distances up to 5000 m, and the 2" or 5" accuracy guarantee high precision in the 3D coordinates calculation.

The integrated temperature and pressure sensors are further helpful tools that make any measure reliable and accurate.

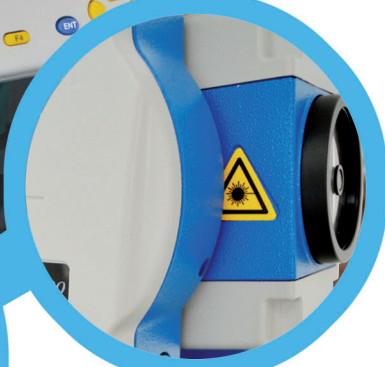

Laser Technology (Class 3 with a wavelength between 650 and 690nm) for distance measurements



Alphanumerical keyboard on both sides with high resolution backlit large LCD display



See more @ <http://www.stonexpositioning.com/index.php/en/prodotti/total-stations>

### LONG RANGE, HIGH PRECISION

Reflectorless 350m - 500m (2"/5" accuracy), range up to 5000m with single prism

### EASY DATA

Easy data communication with the mini USB port

### RELIABLE MEASUREMENTS

Narrow beam laser technology guarantees precise and reliable points positioning calculations

### USER FRIENDLY

Alphanumerical keyboard on both sides with high resolution backlit large LCD display

### CAPACITY

Large storage capacity with 128MB internal memory and up to 2GB SD card for external memory

## KEY FEATURES

## TECHNICAL FEATURES R2 PLUS L

R2 Plus L Models		
Plus 350	R2 -2"	R2 -5"
Plus 500	R2 -2"	R2 -5"

Angle measurement	
Reading system	Absolute encoder
Display resolution	1" /5" /10"
Angle Units	DEG 360°/GON 400/MIL 6400
Accuracy	2" or 5"
Telescope	
Magnification/ Field of view	30X/1°30'
Tube length	156 mm
Minimum focus distance	1.0 m (3.26 ft)
Reticle	10 brightness levels adjustable
Objective aperture	φ 45 mm
Laser pointer	Red light, coaxial
Tilt sensor	
Type	Electronic, dual-axis
Compensation range/accuracy	± 3.0'/1"
Distance Measurement Range (Good Condition) <sup>1</sup>	
Standard mode/Prism	1.0 ~ 3000 <sup>2</sup> 2000 <sup>3</sup> 1500 <sup>4</sup> Class1 up to 5000/7000 m Class 3
Reflective sheet (60mm x 60mm)	1.0 ~ 800 m
Without Prism	1.0 ~ 350 <sup>5</sup> m - 1.0 ~ 500 <sup>5</sup> m
With Mini Prism	1.0 ~ 800 m
Distance Measurement Accuracy	
Standard mode/Prism	± (2+2x10 <sup>-6</sup> D) mm
Reflective sheet (60mm x 60mm)	± (3+2x10 <sup>-6</sup> D) mm
Without Prism	2-150m: ± (3+2x10 <sup>-6</sup> D)mm 150-300m: ± (5+3x10 <sup>-6</sup> D)mm 300-500m: ± (10+5x10 <sup>-6</sup> D)mm
Measurement Time (max 20s)	
Standard mode/Prism <sup>6</sup> (Tracking/Fast/Fine)	0.5 sec / 1.5 sec / 2.0 sec

Specifications subject to change without notice

Distance Measurement	
Distance Unit	m/ft/US ft
Laser plummet	
Laser type	± 1mm/1.5 m
Laser brightness	Adjustable
Level vial sensitivity	
Plate level	30 (″2mm)
Circular level	8 (″2mm)
Environmental conditions	
Operating / Storage Temperature	-20° C ; +50° C / -30° C ; +70° C
Protection to dust and water	IP55
Weight	
Weight including battery and tribrach	5.5 Kg
Power	
Battery Voltage/Capacity	7.4V / 3400mAh Li-ion
Operating period (angle measurement)	36 hours
Operating period (distance meas. every 30 seconds)	19 hours
Battery charger	110/220V, charging time: approx.4h
Other specifications	
Display/Keyboard	Two sides, large LCD, 240x128 dots/Alphanumeric
Memory	128 MB internal + 2 GB SD card
Interface	RS-232C / USB/ SD card/Bluetooth™ (optional)
Sensors	Built in temperature/pressure sensors
On board field application programs	
Data recording and management, Setting out, Resection, Intersection, Point to line, Area calculation, Offset, Road, Cogo, Construction, Lead	

<sup>1</sup>Good condition: no haze, visibility about 40km, no heat shimmer, breeze.<sup>2</sup>Visibility about 40 km, sunny, no heat shimmer.<sup>3</sup>Visibility about 20 km, moderate sunlight, slight heat shimmer.<sup>4</sup>Visibility about 10 km light haze, severe heat shimmer.<sup>5</sup>Visibility about 20 km, back light less than 5000 lx, no haze, no direct sunlight. No prism target: KODAK CAT NO.E1527795 (reflectivity: 90%, size: A4).<sup>6</sup>Best testing condition: indoors, target is far away about 10 m, prism or KODAK board.



STONEX AUTHORIZED DEALER

STONEX® srl  
Via Cimabue 39 - 20851 Lissone (MB) Italy  
Phone +39 039 2783008 Fax +39 039 2789576  
www.stonexpositioning.com  
info@stonexpositioning.com