

DRINKING WATER FAUCETS EF-SERIES

AVAILABLE FINISHES

- Brushed Nickel (BN)
- Oil-Rubbed Bronze (ORB)
- Venetian Bronze (VB)
- Bright Chrome (C)
- Brushed Chrome (BC)
- Black (BLK)
- White (WH)
- Almond (AL)
- Polished Brass (PB)
- Chrome w/Brass Accent (B)

USES
Dispense drinking water from filtration devices, reverse osmosis treatment systems, water chillers, and other water processing equipment. Suitable for home and commercial installations. For cold water use only.


OPERATING CONDITIONS

Pressure	100 psi (6 bar) maximum
Water Temperature	100°F (38°C) maximum
Flow Rate	0.5 to 1.5 GPM (1.9 to 5.7 LPM) typical

CONSTRUCTION
Solid metal construction featuring premium grade non-leaded brass alloy. A ceramic valve provides for smooth quarter-turn action and excellent durability for years of trouble-free service life.
Faucet shank connects to 1/4"OD poly tubing with integral compression fitting.

COMPLIANCE
Models so marked are certified by IAPMO to ANSI/NSF-372 for toxicological safety.
Compliant with California Proposition 65 and AB1953.

**EMD
Global**
EMD Global LLC
Loveland, CO USA
970.225.9876
www.emdglobal.net
www.hydro-genics.com

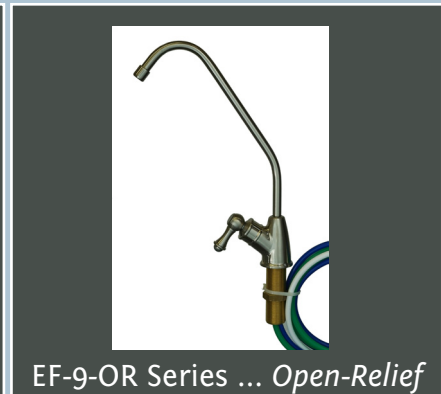

EF-9 Series

Enduring Iconic style is a standard of design & function.

- Overall Height: 9.25"
- Tip Height: 7.5"
- Tip Reach: 6.25"
- Escutcheon diameter: 1.75"
- Hole diameter: 0.5"

EF-9-OR “Open Relief” Series

Also known as “Vented” or “3-line” design provides a safer alternative by keeping system pressure on filter housing only when water is dispensed. Prevents leaks and flooding.

- Overall Height: 9.25"
- Tip Height: 7.5"
- Tip Reach: 6.25"
- Escutcheon diameter: 1.75"
- Hole diameter: 0.5"

EF-9-AG Air Gap Series

Provides the air-gap functionality required by many state or local plumbing codes.

- Overall Height: 9.25"
- Tip Height: 7.5"
- Tip Reach: 6.25"
- Escutcheon diameter: 1.75"
- Hole diameter: 0.5"

EF-32 Series

Soft & sophisticated, vase style body.

- Overall Height: 10"
- Tip Height: 7.25"
- Tip Reach: 5"
- Escutcheon diameter: 1.75"
- Hole diameter: 0.5"

EF-70


Elegant, rugged, with a substantial solid feel.

- Overall Height: 9.5"
- Tip Height: 7.38"
- Tip Reach: 5.25"
- Escutcheon diameter: 2.12"
- Hole diameter: 0.5"

EF-97 Series

Contemporary European style.

- Overall Height: 10.75"
- Tip Height: 7.25"
- Tip Reach: 5.75"
- Escutcheon diameter: 1.75"
- Hole diameter: 0.5"

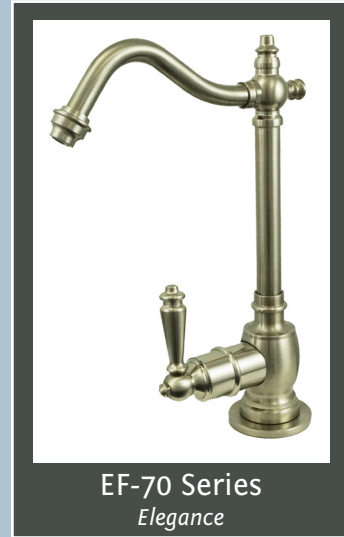

QUALITY TEST PERFORMANCE

Operating Cycles

Valves tolerate a minimum 500,000 ON/OFF cycles

Burst Pressure

400 psi minimum

Corrosion Resistance

Meets industry requirements for salt spray tolerance.

Quality Assurance

Each unit undergoes 17 separate checks for quality, function, & fit.

**EMD
Global**

EMD Global LLC

Loveland, CO USA

970.225.9876

www.emdglobal.net

www.hydro-genics.com