



Shield Fall Protection
Be Safe, Shield Yourself

KL200 Offset D - Keylock nose

Data Sheet



CE 0120 E11362-04B DN

Gate Options




Screwgate

Unscrew, open



Twistlock (double-action)

Turn, open



Supersafe (triple-action)

Lift, turn, open



Keylock non-snag nose.


climb. work. rescue.

I|S|C

SOLUTIONS IN METAL

ISC Performance Karabiners are forged for best build quality and feature a unique 'Blind' nose, which improves performance by reducing snagging. The Barrels have been designed with a square cut notch to limit debris build up.

ISC Karabiners are of sleek ergonomic design, with a high strength to weight ratio.

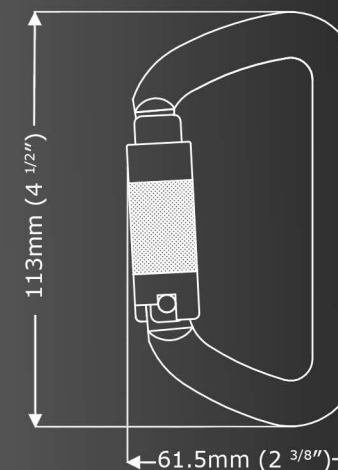

Average weight	279g (9.8oz)
Gate opening*	18mm (3/4")
Gate Strength test	ANSI z359:12 2009 3600lb
Body material	Steel
Finish	Zinc plated
MBS	<u>50(kN)</u> (11240lbf)

*Gate opening measurements are approximate

www.shieldfallprotection.com



Shield Fall Protection

Be Safe, Shield Yourself

KL321 Offset Oval Keylock Karabiner

Data Sheet



Gate Options



Screwgate

Unscrew, open



Twistlock (double-action)

Turn, open



Supersafe (triple-action)

Lift, turn, open


climb. work. rescue.

I|S|C

SOLUTIONS IN METAL

ISC Performance Karabiners are forged for best build quality and feature a unique 'Blind' nose, which improves performance by reducing snagging. The Barrels have been designed with a square cut notch to limit debris build up.

ISC Karabiners are of sleek ergonomic design, with a high strength to weight ratio.

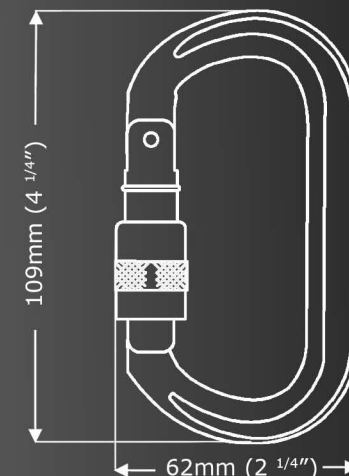

Average weight	193g (6.8oz)
Gate opening*	17mm (5/8")
Body material	Steel
Finish	Zinc plated
MBS	<u>40(kN)</u> (8992lbf)

*Gate opening measurements are approximate

Options

ANSI Compliant Barrels Available on request




Shield Fall Protection


Be Safe, Shield Yourself

KH407 Scaffold Hook

Data Sheet

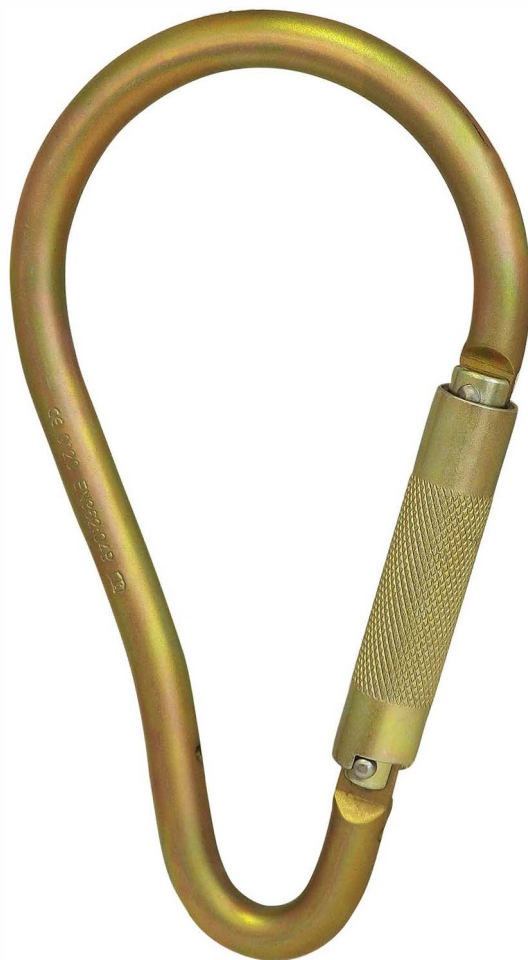

Gate Options



Twistlock
(double-action)

Turn, open

www.shieldfallprotection.com

climb. work. rescue.

I|S|C

SOLUTIONS IN METAL

ISC Performance Karabiners are forged for best build quality and feature a unique 'Blind' nose, which improves performance by reducing snagging. The Barrels have been designed with a square cut notch to limit debris build up.

ISC Karabiners are of sleek ergonomic design, with a high strength to weight ratio.



Average weight	678g (23.09oz)
Gate opening*	53mm (2 1/8")
Gate Strength test	ANSI z359:12 2009 3600lb
Body material	Steel
Finish	Zinc plated
MBS	<u>35(kN)</u> (7868lbf)

*Gate opening measurements are approximate




Shield Fall Protection


Be Safe, Shield Yourself

KH400 Atlas Scaffold Hook

Data Sheet

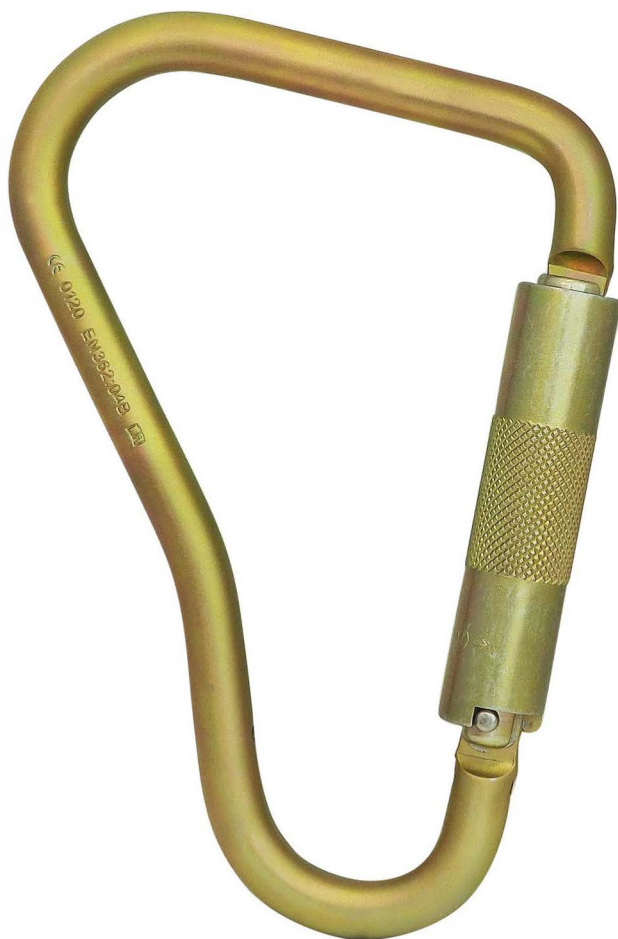

Gate Options



Twistlock
(double-action)

Turn, open

www.shieldfallprotection.com


climb. work. rescue.

I|S|C

SOLUTIONS IN METAL

ISC Performance Karabiners are forged for best build quality and feature a unique 'Blind' nose, which improves performance by reducing snagging. The Barrels have been designed with a square cut notch to limit debris build up.

ISC Karabiners are of sleek ergonomic design, with a high strength to weight ratio.

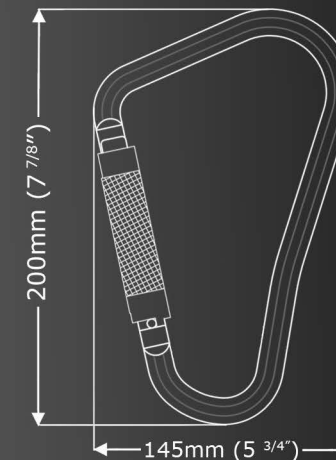

Average weight	816g (28.08oz)
Gate opening*	57mm (2 1/4")
Body material	Steel
Finish	Zinc plated
MBS	45(kN) (10116lbf)

*Gate opening measurements are approximate

Options

ANSI Compliant Barrels Available on request

Captive Pin Available on request



Shield Fall Protection
Be Safe, Shield Yourself

KH200 Stainless D Shape Karabiner

Data Sheet



Gate Options

Screwgate

Unscrew, open

Supersafe (triple-action)

Lift, turn, open



Twistlock (double-action)

Turn, open


climb. work. rescue.

I|S|C

SOLUTIONS IN METAL

ISC Performance Karabiners are forged for best build quality and feature a unique 'Blind' nose, which improves performance by reducing snagging. The Barrels have been designed with a square cut notch to limit debris build up.

ISC Karabiners are of sleek ergonomic design, with a high strength to weight ratio.

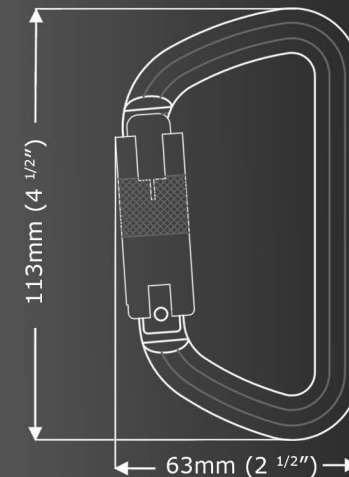

Average weight	255g (9oz)
Gate opening*	20mm (3/4")
Body material	Stainless Steel
Finish	Zinc plated
MBS	35(kN) (7868lbf)

*Gate opening measurements are approximate

Options

ANSI Compliant Barrels Available on request

Captive Pin Available on request



Shield Fall Protection

Be Safe, Shield Yourself

KH307 Stainless Firemans Hook

Data Sheet




Gate Options



Screwgate

Unscrew, open



Twistlock
(double-action)

Turn, open


climb. work. rescue.

I|S|C

SOLUTIONS IN METAL

ISC Performance Karabiners are forged for best build quality and feature a unique 'Blind' nose, which improves performance by reducing snagging. The Barrels have been designed with a square cut notch to limit debris build up.

ISC Karabiners are of sleek ergonomic design, with a high strength to weight ratio.

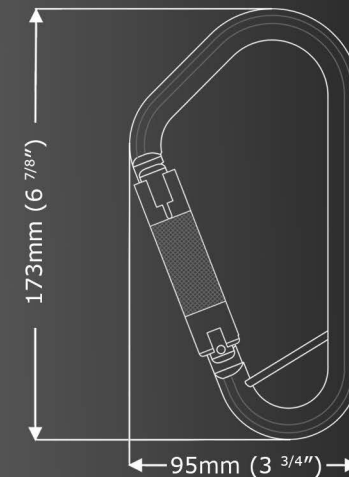

Average weight	400g (14.1oz)
Gate opening*	48mm (1 7/8")
Body material	Stainless steel
Finish	Polished
MBS	40(kN) (8992lbf)

*Gate opening measurements are approximate

Options

ANSI Compliant Barrels Available on request

Captive Pin Available on request

www.shieldfallprotection.com



Shield Fall Protection

Be Safe, Shield Yourself

KH453 Gator Karabiner

Data Sheet




climb. work. rescue.

I|S|C

SOLUTIONS IN METAL

ISC Performance Karabiners are forged for best build quality and feature a unique 'Blind' nose, which improves performance by reducing snagging. The Barrels have been designed with a square cut notch to limit debris build up.

ISC Karabiners are of sleek ergonomic design, with a high strength to weight ratio.

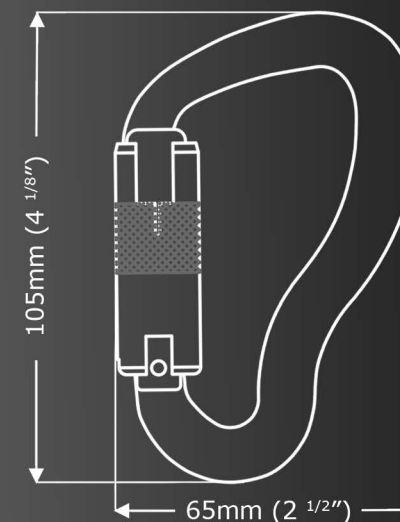


ISC Aluminium Karabiners have colour-coded Barrels/ Ferrules for quick, easy identification.

Screwgate



Unscrew, open




Twistlock
(double-action)

Turn, open

Supersafe
(triple-action)

Lift, turn, open



Quadlock
(quad-action)

Turn, lift, turn, open

Average weight	47g (1.7oz)
Gate opening*	15mm (5/8")
Blind nose	Yes
Body material	Aluminium
Finish	Anodised
MBS	<u>25(kN)</u> (5620lbf)

*Gate opening measurements are approximate