

Stock # T36


One (1) GE Transformer 112.5 kva, 3 phase, 60 hz transformer, 40 deg C amb. 150 Deg C rise, 220 Deg C system, AL conductor, Imp 5.4%

Primary voltage: 480 v delta 10 kv Bil

Secondary voltage 208 Y/120 , 10 kv BIL

Catalog No 9T23B3873 Type QL, Made in Mexico

Shipping size 41"xx 31x 46" H 691 lbs

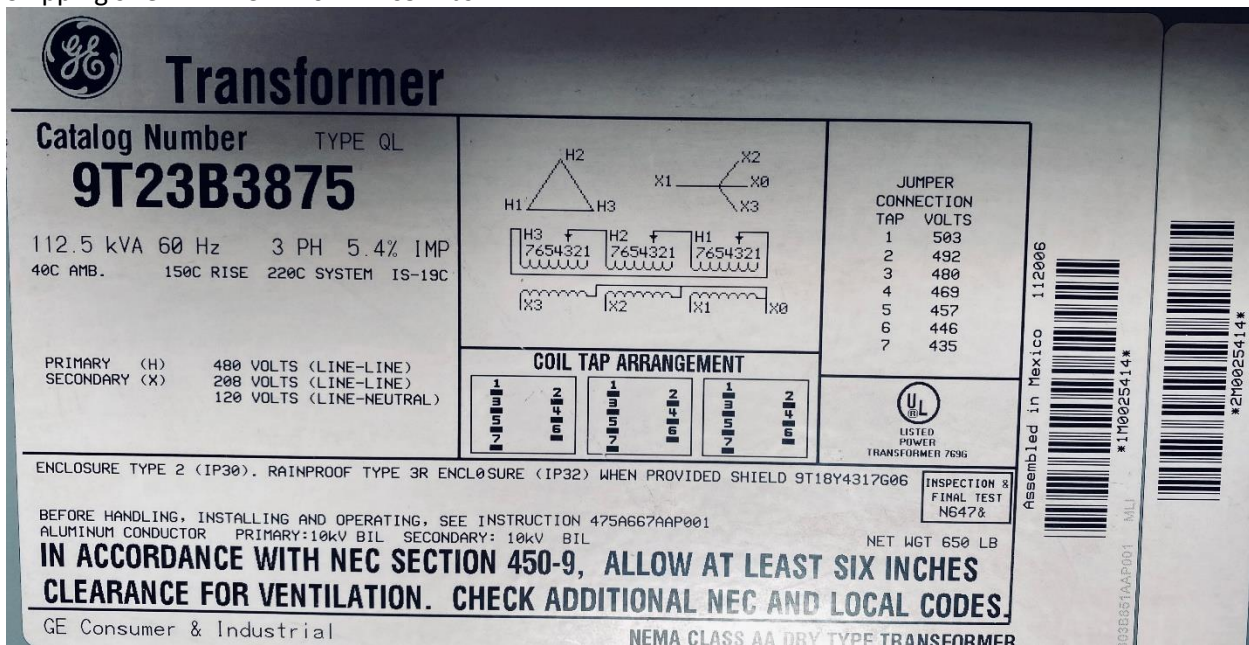

Transformer

Catalog Number TYPE QL
9T23B3875

112.5 kVA 60 Hz 3 PH 5.4% IMP
 40C AMB. 150C RISE 220C SYSTEM IS-19C

PRIMARY (H) 480 VOLTS (LINE-LINE)
 SECONDARY (X) 208 VOLTS (LINE-LINE)
 120 VOLTS (LINE-NEUTRAL)

COIL TAP ARRANGEMENT

JUMPER CONNECTION TAP	VOLTS
1	503
2	492
3	480
4	469
5	457
6	446
7	435

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G06

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001
 ALUMINUM CONDUCTOR PRIMARY: 10kV BIL SECONDARY: 10kV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

GE Consumer & Industrial

NET WGT 650 LB

INSPECTION & FINAL TEST N647&

UL LISTED POWER TRANSFORMER 7636

Assembled in Mexico 112006

1M025414

210025414

NEMA CLASS AA DRY TYPE TRANSFORMER

