



WEBER CARBURETOR CONVERSION KIT INSTALLATION GUIDE

PART # WK746 AND WK746-38 TOYOTA 20/22R CARBURETED VEHICLES

THIS KIT IS FOR THE FOLLOWING APPLICATIONS:

PICKUP
CELICA

20R/22R All Carbureted Models
20R/22R All Carbureted Models

Thank you for purchasing a Weber carburetor conversion kit. Our kits are designed to unleash the performance potential of your engine but not at the cost of reliability and fuel Efficiency.

This installation guide covers vehicle preparation, old carburetor removal, carburetor installation, and new carburetor adjustments. A trouble-shooting guide is supplied if needed.

Before installation please read this guide thoroughly and if you have any questions please call our Toll Free Technical line at 1 800 871-3405.

Any items in BOLD FACE TYPE or with a  next to it, Please pay extra attention to. This will help to ensure an error free installation with optimal vehicle operation.



**THIS CARBURETOR CONVERSION KIT
INCLUDES:
A NEW 32/36 DGEV-IC CARBURETOR
MANIFOLD BASE ADAPTER
HARDWARE/LINKAGE KIT
CHROME AIR CLEANER**



The Following is a List of the Tools that will be needed to install this conversion kit:

- Metric Socket and Wrench Set
- Metric Allen Key Set
- Screwdrivers
- Pliers (needle nose)
- Gasket Scraper
- Wire Brush

The Following is a list of supplies that are needed to install this conversion kit:

- Carburetor Cleaner
- Clean Rags
- Engine Cleaner
- Aluminum Foil
- Tags (these are needed to label hoses etc.)

The Following is a list of optional items that are very helpful in installing this conversion kit:

- Vacuum Gauge/ Tester
- Fuel Pressure Gauge/ Tester
- Flashlight
- Magnet
- Vehicle Shop Manual
- Haynes Weber Book HM393
- HP Weber Book HP774

Legal in California only on racing vehicles which may never be driven on a highway.





WEBER CARBURETOR CONVERSION KIT INSTALLATION GUIDE

FOR SAFETY PURPOSES:

- **USE CLAMPS ON ALL FUEL HOSES.**
- **DO NOT USE GASKET SEALERS, USE GASKETS PROVIDED.**
- **WHEN REMOVING OLD CARBURETOR LABEL ALL HOSES AND WIRES.**
- **IF NECESSARY CLEAN ENGINE BEFORE INSTALLATION.**
- **USE LOCTITE ON HARDWARE INSIDE AIR CLEANER AND INTAKE MANIFOLD STUDS.**
- **IF REWIRING IS NEEDED ALWAYS USE AN INSULATED CONNECTOR OR TAP.**
- **NEVER ALLOW DIRT IN THE CARBURETOR.**
- **DO NOT OVERTIGHTEN JETS OR THROTTLE LINKAGE.**
- **NEVER OPERATE THE ENGINE WITHOUT A FUEL FILTER.**
- **DO NOT ALLOW FUEL TO SPILL OR LEAK.**
- **BE CAREFUL NOT TO CUT OR DENT THE ALUMINUM GASKET SURFACES OF THE INTAKE MANIFOLD OR CARBURETOR.**
- **ALWAYS WEAR EYE PROTECTION.**

This section should be completed before you install this Weber Conversion Kit.

- Please make sure that the Parts were not damaged in shipment.
- Please check the contents of the kit against the picture on page 1.
- If any parts were missing or the parts were damaged in shipping please contact your Weber Dealer.
- Verify that your vehicle had a recent tune up and you do not have any other mechanical problems. The Weber Carburetor can not fix engine, and ignition problems.
- Weber Carburetors require 3.5 p.s.i. of Fuel pressure. If your fuel pressure is more than 3.5 p.s.i, obtain a Fuel Pressure Regulator from your Weber Dealer.
- The electric choke and idle cut-off solenoids require a key hot 12-Volt source.
- Connect the electric choke to the Vehicles existing electric choke power source using a jumper wire.
- You must remove the EGR valve pipe. The manifold will be sealed with the plate provided in the kit. (check local laws)
 **YOU SHOULD HAVE NO EXHAUST GAS LEAKING FROM THE EGR.** 
- Weber Carburetors are preset at the Factory.
Only make adjustments to the carburetor after the installation, and running the vehicle for the first time. After the carburetor is installed record the factory settings if needed in the future.
- Please save your sales receipt and all carburetor documentation for future use.

Any items in BOLD FACE TYPE or with a  next to it, Please pay extra attention to. This will help to ensure an error free installation with optimal vehicle operation.



WEBER CARBURETOR CONVERSION KIT INSTALLATION GUIDE

REMOVAL OF OLD CARBURETOR

- Remove the Battery's negative cable.
- Take off the original Air Cleaner Assembly.
- Remove the Fuel Supply hose that is attached to the carburetor and label it.
- Remove the Fuel Return hose and plug it.
- Remove and label the vacuum hoses connected to the carburetor.
- Remove and label all of the electrical connectors attached to the carburetor. Identify the electric choke wire.
- Remove the Float bowl Vent hose and plug it.
- Remove and label all electrical and vacuum connections to the vacuum switching valves and remove them along with the vacuum manifold.
- Remove the PCV hose from the Carburetor.
- Remove carburetor and all spacers and gaskets from the intake manifold. Place a clean rag in the intake opening to keep dirt and tools etc. out.



DO NOT FORGET TO REMOVE THE RAG BEFORE INSTALLING THE WEBER CARBURETOR



- Remove the manifold studs from the intake manifold. Double nut each stud to remove.



DOUBLE NUTTING MAY RUIN THE NUTS BUT WILL NOT DAMAGE THE STUDS



- Remove any excess gasket material from intake manifold. You can use a gasket scraper, wire brush and carburetor cleaner.



DO NOT USE A WIRE WHEEL OR ANY POWER TOOLS AS THEY MAY DAMAGE THE MANIFOLD



WEBER CARBURETOR INSTALLATION

- Install the EGR plate on the intake manifold, and screw the vacuum fitting into it.
- Remove the adapter plates, gaskets and hardware from the packaging. Please see picture for order of installation.
- Mount the first adapter and gasket to the intake manifold making sure that the allen head bolts are flush. Mount the top adapter and gasket to the bottom adapter plate.
- Remove the carburetor from the box, locate the throttle lever and fold back the lock tab and remove the throttle lever from the carburetor and replace it with the throttle lever that is supplied with the kit.



DO NOT OVERTIGHTEN THE NUT FOR THE THROTTLE LEVER LINKAGE BINDING MAY OCCUR








Any items in BOLD FACE TYPE or with a  next to it, Please pay extra attention to. This will help to ensure an error free installation with optimal vehicle operation.



WEBER CARBURETOR CONVERSION KIT INSTALLATION GUIDE

WEBER CARBURETOR INSTALLATION (continued)



- Install the Weber Carburetor on the four mounting studs. Using a criss-cross pattern tighten evenly. Fuel Inlet Faces front of Vehicle.  **DO NOT OVERTIGHTEN** 
- For 4 Wheel Drive trucks only. The original throttle cable bracket has to be raised. Use the spacers and allen bolts in the linkage kit. They mount under the bracket.
- Reinstall the throttle linkage rod to the carburetor.
- For adjustment of the throttle rod (cable)
- Throttle Linkage adjustments (cable or rod): While holding the choke plates open turn the throttle linkage by hand to release the fast idle cam from the screw then release the throttle lever. Now adjust the rod or cable until you have some free play. To check for full throttle operation have a helper hold the accelerator pedal to the floor and check the throttle lever by hand for additional travel, you can shorten the cable or lengthen the rod as required to eliminate additional travel. Hold the choke plates open and release the accelerator pedal and check again for any free play.
 **You must have free play in the cable or rod and throttle lever must return to the idle position every time you press on the accelerator pedal YOU SHOULD NOT GO ANY FURTHER IN THE INSTALLATION UNLESS THE THROTTLE IS WORKING PERFECTLY** 
- If vehicle is equipped with an automatic transmission, make sure that the A/T kickdown cable pulls till its end when the accelerator is to the floor.
- Locate the fuel inlet pipe (see picture) on the carburetor and connect the supply line to it.
- Take the EGR hose and connect it to the fitting that was installed in the EGR plate.
- Locate the vacuum advance hose and connect it to the vacuum advance port on the carburetor. (see picture)
- Locate any open vacuum ports and hoses and plug them. (check local laws)
- Locate the wire for the electric choke and connect to the electric choke.
- At this point make sure that all hose clamps are tightened and that all of the electrical connectors are connected and insulated.
- Reconnect the Battery's negative cable.

Any items in BOLD FACE TYPE or with a  next to it, Please pay extra attention to. This will help to ensure an error free installation with optimal vehicle operation.



WEBER CARBURETOR CONVERSION KIT INSTALLATION GUIDE

WEBER CARBURETOR INSTALLATION (continued)

- Crank Engine without starting and check for fuel leaks.
 **DO NOT GO ANY FURTHER WITHOUT INSPECTING AND FIXING** 
- Remove Air cleaner from packaging. Connect plastic breather tube to air filter base then bolt air filter base to carburetor using the four screws provided.
- Attach the breather hose from the valve cover to the air cleaner.
- Put the air filter element on the air filter base and attach the air cleaner top with the clips provided.
- To check the clearance between the hood and air filter, place some crumpled up aluminum on the air cleaner top and slowly lower the hood and check clearance.

CARBURETOR ADJUSTMENTS (see pictures for identification of components)

- Only make the adjustments discussed here if necessary.
- To set the idle speed make sure that the engine is warm, set the speed to the vehicle manufacturer's setting. To raise the speed turn the idle screw (clockwise) in, and to lower the speed turn the speed screw (counter clockwise) out.
- To set the idle mixture turn the idle mixture screw in slowly (clockwise) counting the amount of turns you make until the idle speed drops off. Turn the screw out (counter clockwise) counting the turns until the idle drops off again. Turn the screw now back in half the distance that you turned out. Now the mixture is set.
- To set the fast idle make sure that the engine is cold. Press the accelerator pedal to the floor and let go. Start the engine (do not touch the accelerator pedal once you touch the accelerator after the engine is running the fast idle cam is disengaged. The engine should be revving between 2000 and 2500 Rpm's. Turn off the engine. To adjust the fast idle speed turn the fast idle screw in (clockwise) to increase engine RPM, to decrease engine RPM turn the fast idle screw out (counterclockwise) Do not touch the accelerator and restart engine to check RPM.
- The choke is Factory set. To adjust make sure that the engine is cool (below 68F) Turn the throttle linkage all the way to set the choke. The plates should be closed. Make a mark on the plastic choke cap and the carburetor where the two surfaces meet. Loosen the three screws one turn. Hold the throttle about one third open and start twisting the thermostat cap (counter clockwise) until the choke plates fully close, then slowly turn the cap 1/8" (you should feel the spring tension in the choke tightening). Retighten the three screws (do not over tighten). You may now have to go back and check the fast idle speed and adjust if necessary.


Any items in BOLD FACE TYPE or with a  next to it, Please pay extra attention to. This will help to ensure an error free installation with optimal vehicle operation.



WEBER CARBURETOR CONVERSION KIT INSTALLATION GUIDE

TROUBLE SHOOTING GUIDE

In order to properly trouble shoot any suspected carburetor problems please double check the following:

Please read through the Weber Carburetor Installation section. Go over any item that has **BOLD FACE TYPE**
Or has a  next to it.

If the vehicle will not start please check the following:

Check that the fuel pump is functioning properly. Check with pressure gauge.

Make sure that the ignition system is functioning properly.

If the engine idles too fast or too slow or stalls please check the following:

Make sure that you have no vacuum leaks. You should check all engine vacuum line connections and at the carburetor base (including the adapter plates).

Check all Carburetor adjustments. Idle mixture, idle speed, and fast idle. In this order.

If the engine idles fine but acts as if it is running out of fuel when driving please check the following:

If new fuel filter was not installed install one now. The old fuel filter may be clogged.

Check that the fuel pump is functioning properly. Check with pressure gauge.

Check all fuel lines. Make sure that the lines are not pinched or kinked.

Check that the vehicle has not run out of gas.


Check the fuel tank venting system. (Refer to vehicle shop manual)

If the engine runs rough or sounds like it is missing at idle please check the following:

Make sure that you have no vacuum leaks. You should check all engine vacuum line connections and at the carburetor base (including the adapter plates).

Check the idle mixture adjustment.

If you were not able to correct the problem with the information provided above contact your Weber Dealer .

 **Also please remember that any additional engine modifications such as Headers, Hi Performance camshafts, free flow exhaust systems may require that the carburetor be recalibrate.**



If this is the case please contact your Weber Dealer.

Any items in BOLD FACE TYPE or with a  next to it, Please pay extra attention to. This will help to ensure an error free installation with optimal vehicle operation.



WEBER CARBURETOR CONVERSION KIT INSTALLATION GUIDE

CARBURETOR MODEL 32/36 DGEV-IC

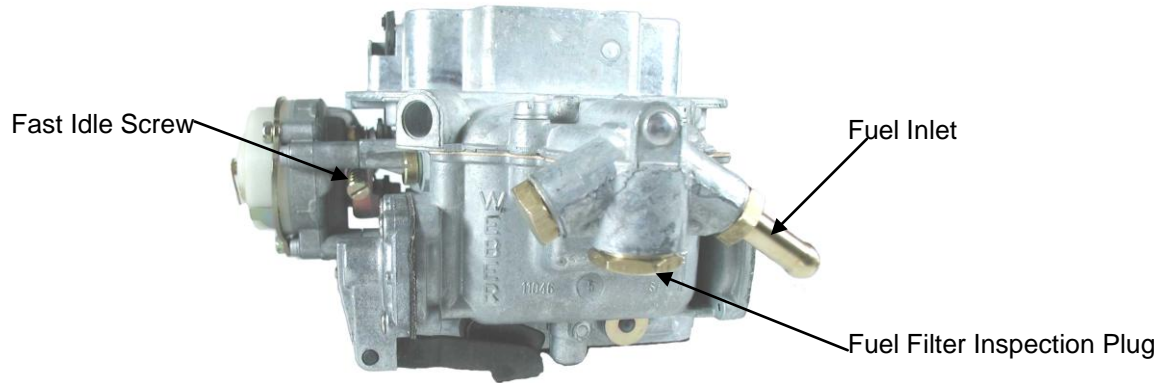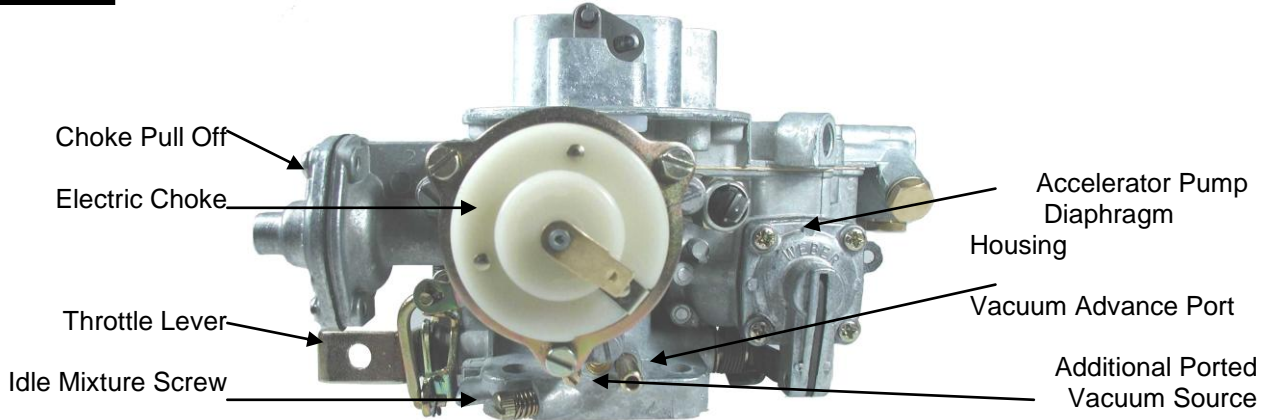


Carburetor Top with Choke Plates Open



EGR PLATE



Throttle Linkage Lever

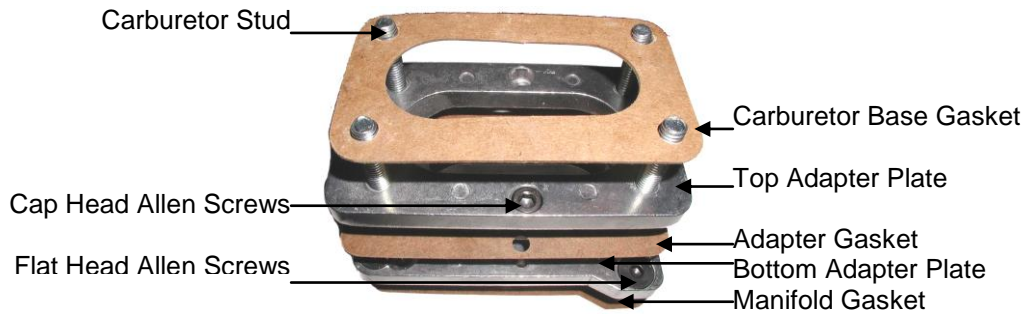

Adapter Assembly