




EXTRUDED ALUMINUM LOUVER

MODEL: 2-SRCF COMBO COMBINATION INTAKE/EXHAUST

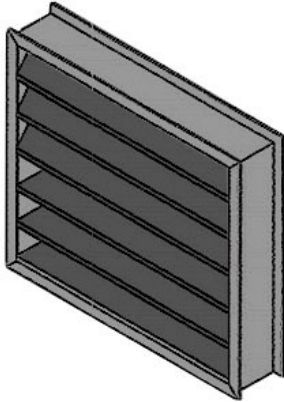

APPLICATION

The 2-SRCF COMBO Stationary Louver with Channel Frame is a 2" deep louver for protection of higher air intake velocities and exhaust in building exterior walls. The louver structure incorporates stationary 36° and 90° blades. The 2-SRCF COMBO is a capable louver with AMCA STD 500 Performance Data allowing designers to select.

SPECIFICATIONS

- Frame:** 0.081 thick extruded aluminum
6063-T5 mill finish
- Blade:** 0.081 thick extruded aluminum
6063-T5 mill finish
- Blade Spacing:** Approximately 3-1/4" center to center
(except at head and sills)
- Fasteners:** 10" x 3/4" tek screws
- Blade Angle:** 36° and 90°
- Min. Height:** 8"
- Max. Single Sec.:** Consult factory for maximum size
- Screen:** Bird screen 1/2" x 1/2" galvanized steel

OPTIONS

- Insect Screen 18" x 16" mesh aluminum
- Bird Screen 1/2" x 1/2" aluminum

- Finish:** Clear Anodized
- Color Anodized
- Powder Coat Paint
- Baked Enamel Paint

