



### **EXCLUSIVE CHARACTERISTICS**

- Superior quality components and fabrication
- ULTRA-SILENT Articulated system DC Motors
- Night head section Keeps the accessibility to the night table
- Illuminated remote control With or without cord (Superior technology – easy to use)

  "Foot Support" Kit – Prevents the mattress from sliding
- Nylon casters fitted into the movable structure
- Load capacity Up to 250lbs (114kg)
- Fast and professional customer service
- ZERO GRAVITY Position (for optimal relaxation)



### **OPTIONS**

- Massage system
- Night light (installed under the bed)

### AVAILABLE DIMENSIONS

36 x 80 in - 91 x 203 cm 39 x 80 in - 99 x 203 cm

54 x 80 in - 137 x 203 cm 60 x 80 in - 152 x 203 cm


\*The picture and / or the color can differ.



# Choice of colours for the deck covers available\*

WILLOW - BLACK - MATCHED

Best guarantee on the market - See your authorized dealer for details ROTEC INTERNATIONAL-QC-CANADA www.rotecbeds.com

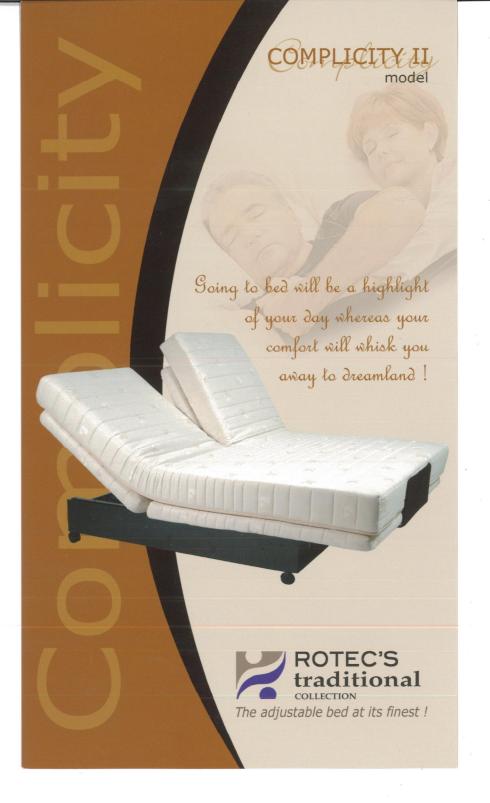








- ULTRA-SILENT Articulated system DC Motors
- Illuminated remote control With or without cord (Superior technology - easy to use)
- "Foot Support" Kit Prevents the mattress from sliding
- Lockable casters or chrome-coloured fixed legs
- Load capacity Up to 250lbs (114kg)
- Fast and professional customer service
- ZERO GRAVITY Position (for optimal relaxation)



### **OPTIONS**

- Massage system
- Night light (installed under the bed)

### AVAILABLE DIMENSIONS

30 x 75 or 80 in - 76 x 191 or 203 (2) cm 36 x 75 or 80 in - 91 x 191 or 203 (2) cm 39 x 75 or 80 in - 99 x 191 or 203 (2) cm

48 x 75 or 80 in - 122 x 191 or 203 (2) cm 54 x 75 or 80 in - 137 x 191 or 203 (2) cm 60 x 75 or 80 in - 152 x 191 or 203 (2) cm

\*The picture and / or the color can differ.



Choice of colours for the deck covers and the trim panels



Deck cover - Willow Trim panel - Rosewood




Deck cover - Black Trim panel - White



Deck cover - Matched Trim panel - Maple

Best guarantee on the market - See your authorized dealer for details ROTEC INTERNATIONAL-QC-CANADA www.rotecbeds.com

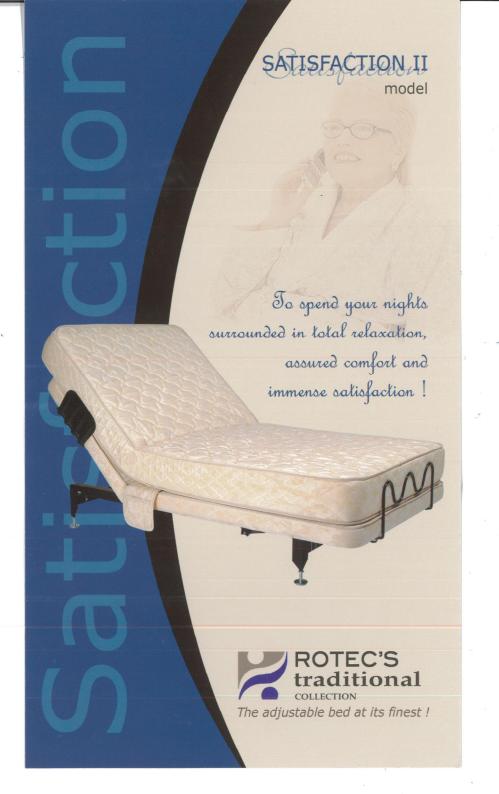





# MULTI-POSITIONS



- Bed weight: 99.1 cm (39 in.) = 118 kg (260 lbs)

137.2 cm (54 in.) = 134 kg (295 lbs) 152.4 cm (60 in.) = 141 kg (310 lbs)

- Minimum height: 33 cm (13 in.)

- Maximum height: 58.4 cm (23 in.)

- Maximum backrest angle: 75 degrees - Maximum footrest angle: 45 degrees

- Available bedspring dimensions:

88.9 cm (35 in.) x 190.5 cm (75 in.) or 203.2 cm (80 in.) 99.1 cm (39 in.) x 190.5 cm (75 in.) or 203.2 cm (80 in.) 137 cm (54 in.) x 190.5 cm (75 in.) or 203.2 cm (80 in.) 152.4 cm (60 in.) x 190.5 cm (75 in.) or 203.2 cm (80 in.)

- Trendelenburg and reverse Trendelenburg position included

# **FEATURES**

- Bed designed for home care, more aesthetically pleasing than a hospital bed
- Whisper-quiet and energy-efficient direct-current linear motor
- Battery ensuring temporary autonomous operation (Backup battery)
- Bed available in all standard dimensions
- Authentic Canadian product

# OPTIONS

- Rotating half-length bed sides
- Tilt-up half-length bed sides
- Metallic half-length bed sides
- Metallic full-length bed sides
- Melamine headboard and footboard available in a choice of colours
- Trapeze bar (which follows the bed motions when adjusting in height)
- Oscillating percussion massage, night light and audible signal package
- Wireless remote control



Ptease contact us for further information or to obtain a \* Photos and specifications may change without prior notice.





- Minimum height: 30.5 cm (12 in.)

- Maximum height: 76.2 cm (30 in.)

- Maximum backrest angle: 70 degrees - Maximum footrest angle: 40 degrees

- Available bedspring dimensions:

88.9 cm (35 in.) x 190.5 cm (75 in.) or 203.2 cm (80 in.) 99.1 cm (39 in.) x 190.5 cm (75 in.) or 203.2 cm (80 in.) 121.9 cm (48 in.) x 190.5 cm (75 in.) or 203.2 cm (80 in.)

- Recommended mattress height: 12.7 cm (5 in.)

# **FEATURES**

- Whisper-quiet direct-current linear motor
- IP54-approved electrical components protected from dust and water infiltration
- 2 receptacles for IV holder stems
- Battery ensuring temporary autonomous operation
- Casters equipped with individual brakes
- Possibility of moving the bed even when in its lowest height position
- Metal surfaces covered with electrostatic powder paint
- Selectable, manually adjustable foot angle (choice of two positions: flexion and standard)
- Ideal bed for home care patients or long-term care facilities
- Authentic Canadian product

## **OPTIONS**

- Rotating half-length bed sides
- Tilting half-length bed sides
- Half-length metal bed sides
- Full-length metal bed sides
- Full-length Rotec bed sides
- Cast composite or melamine headboard and footboard
- Trapeze bar (which follows the bed motions when adjusting in height)
- Nurse control
- Composite pandeck overlay
- Transportation dolly





Brilliantly designed

# Multi-Tech...



# **Accessories and Options**

# Multi-Tech<sup>tm</sup> Accessories and Options

Picture	Description
	Rotec rotating half side rails (RDRTG2-28-MT)
	Rotec tilt-up half side rails  (RDB-28-MT)  Installed at the head only
	Rotec tilt-up half side rails (RDB-23-MT)

Picture	Description
	Rotec rotating half side rails (RDRTG2-28X14-MT)
	Metallic half side rails (MDS-30-MT)
	Rotec full side rails  36" (RPLG2-6736-MT)  39" (RPLG2-6739-MT)  48" (RPLG2-6748-MT)

Picture	Description
	Melamine headboard or footboard 3 colours available • White • Rosewood • Maple
	Bed width
	36", 39" or 48"
	Composite headboard or footboard  Headboard (36"-39")  (RT-41-MT)  Footboard (36"-39")  (RP-41-MT)
	Central brake pedal  (except on 48" beds)

Picture	Description
	Composite platform cover  Bed width  36", 39" or 48"
00 00 00 00 00 00 00 00 00 00 00 00 00 00	Digital Nurse Control Integrated into the footboard  (This option has to be ordered with the footboard)
	Digital Patient Control integrated in the head side rails  (This option has to be ordered with the Nurse Control and a rotating half side rails 28x14)
	Trolley for beds

Picture	Description
	Metallic support with bar and trapeze 36", 39" or 48"
	1" height clearance extension
	2" height clearance extension



# MULTITECH 8



- Load capacity: 264 kg (580 lbs)
- Bed weight: 111 kg (245 lbs)
- Minimum height: 21.6 cm (8.5 in.) Maximum height: 73.7 cm (29 in.)
- Maximum backrest angle: 68 degrees Maximum footrest angle: 34 degrees
- Bedspring dimensions: 88.9 cm (35 in.) x 198.1 cm (78 in.)
- Overall external dimensions (with sides, half-section): 102.5 cm (41 in.) x 229.6 cm (90 3/8 in.)
- Recommended mattress height: 12.7 cm (5 in.)
- Support for trapeze bar included
- Trendelenburg position included

# **FEATURES**

- Whisper-quiet direct-current linear motor
- IP54-approved electrical components protected from dust and water infiltration
- 6 receptacles for IV holder stems
- Battery ensuring temporary autonomous operation
- Casters equipped with a central brake system (synchronized) (2 x 2 casters)
- Possibility of moving the bed even when in its lowest height position
- Metal surfaces covered with electrostatic powder paint
- Selectable, manually adjustable foot angle (choice of three positions: flexion, standard and extension)

Please contact

- Bed may be separated into two sections for easier transport
- Headboard and footboard bumpers
- Reduced-height bed designed to minimize the possibility of falling
- Bed with the highest load capacity in its category
- Authentic Canadian product

# OPTIONS

- Rotating half-length bed sides
- Cast composite or melamine headboard and footboard
- Trapeze bar (which follows the bed motions when adjusting in height)
- Nurse control
- Transportation dolly

# **APPROVALS**

- CSA Canada & USA - File No. 1608300

Standards: C22.2 No. 0M91 C22.2 No. 601.1 Amendment 2

C22.2 No. 601.1 M90 C22.2 No. 60601-2-38-03

C22.2 No. 601.1S1 94 UL No. 60601-1

20TEC INTERNATIONAL  Rotec International holds medical instrument manufacturing licenses issued by Health Canada and the FDA.
 \*Photos and specifications may change without prior notice.



Brilliantly designed

# Multitech 8...



# **Accessories and Options**

1

Quebec Canada Revision : 2014

# Multitech 8<sup>tm</sup> Accessories and Options

Picture	Description
	Rotec rotating half side rails (RDRTG2-28-MT8)
	Rotec tilt-up half side rails (RDB-28-MT8)
	Rotec rotating half side rails (RDRTG2-28X14-MT8)

Picture	Description
	Composite platform cover (36-MT8)
0.000 0.6.6.0	Digital Nurse Control Integrated into the footboard  (This option has to be ordered with the footboard)
	Melamine headboard or footboard 3 colours available • White • Rosewood • Maple
	Composite headboard or footboard  Headboard (RT-41-MT8)  Footboard (RP-41-MT8)

Quebec Canada Revision : 2014

Picture	Description
	Bar with trapeze
	Rotec full side rails 36" (RPLG2-7336-MT8)
	Trolley for beds

Picture	Description
	Integrated scale
	Integrated scale with a Bed Exit Alarm
	Digital Patient Control integrated in the head side rails  (This option has to be ordered with the Nurse Control and a rotating half side rails 28x14)
	C.P.R.



# VARITECH



- Load capacity: 499 kg (1,100 lbs)
- Bed weight: 140.5 kg (309 lbs)
- Minimum height: 33.3 cm (13 1/8 in.) Maximum height: 76.8 cm (30 1/4 in.)
- Maximum backrest angle: 68 degrees Maximum footrest angle: 34 degrees
- Bedspring dimensions: 88.9 cm (35 in.) to 134.6 cm (53 in.) x 198.1 cm (78 in.)
- Overall external dimensions (with sides, half-section): 102.5 cm (41 in.) to 149.9 cm (59 in.) x 229.6 cm (90 3/8 in.)
- Recommended mattress height: 12.7 cm (5 in.)
- Support for trapeze bar included
- Trendelenburg position included

# **FEATURES**

- Whisper-quiet direct-current linear motor
- IP54-approved electrical components protected from dust and water infiltration
- 6 receptacles for IV holder stems
- Battery ensuring temporary autonomous operation
- Casters equipped with a central brake system (synchronized) (2 x 2 casters)
- Possibility of moving the bed even when in its lowest height position
- Metal surfaces covered with electrostatic powder paint
- Selectable, manually adjustable foot angle (choice of three positions: flexion, standard and extension)
- Bed may be separated into two sections for easier transport
- Adjustable-width bedspring
- Headboard and footboard bumpers
- Afforable ajustable-width bariatric bed
- Bed with the highest load capacity in its category
- Authentic Canadian product

# OPTIONS

- Rotating half-length bed sides
- Cast composite or melamine headboard and footboard
- Trapeze bar (which follows the bed motions when adjusting in height)
- Nurse control
- Built-in digital scale
- Sectional Varitech SHD mattress

# **APPROVALS**

- CSA Canada & USA - File No. 1608300

Standards: C22.2 No. 0M91

C22.2 No. 601.1 Amendment 2

C22.2 No. 601.1 M90 C22.2 No. 60601-2-38-03

C22.2 No. 601.1S1 94 UL No. 60601-1

- Transportation dolly

Rotec International holds medical instrument manufacturing licenses issued by Health Canada and the FDA.
Photos and specifications may change without prior notice.



Brilliantly designed

# Varitech...



# **Accessories and Options**

# Varitech<sup>tm</sup> <u>Accessories and Options</u>

Picture	Description
	Rotec rotating half side rails
	(RDRTG2-28-V)
	Rotec tilt-up half side rails (RDB-28-V)
	Rotec rotating half side rails (RDRTG2-28X14-V)

Picture	Description
	Rotec full side rails (RPLG2-673654-V)
20 50 00 8, 5, 6,	Digital Nurse Control Integrated into the footboard  (This option has to be ordered with the footboard)
	Melamine headboard or footboard 3 colours available • White • Rosewood • Maple (37")
	Composite headboard or footboard  Headboard  (RT-41-V)  Footboard  (RP-41-V)

Picture	Description
	Mattress with variable width designed for Varitech SHD (3 pcs)
	Bar with trapeze
	Trolley for beds

Quebec Canada Revision : 2014

Picture	Description
	Integrated scale
	Integrated scale with a Bed Exit Alarm
	Digital Patient Control integrated in the head side rails  (This option has to be ordered with the Nurse Control and a rotating half side rails 28x14)
	Plungers

# Versatech 600

Low-profile bed



ADJUSTABLE BEDS

Brilliantly designed

# The Versatech difference

Extremely reliable, mobile and flexible, the Versatech was designed to ensure the utmost in safety for both patients and medical staff. With its ability to be lowered to 8 in. from the floor, with a 600 lb. total load capacity and a broad range of features, the Versatech bed is nothing short of brilliantly designed!

- Can be lowered to **8 in.** from the floor, thus minimizing the risk of falls and simplifying the application of restraint protocols.
- Sturdy and reliable, with a load capacity of 600 lb. (Also available with a load capacity of 1100 lb.)
- Fixed frame provides greater stability, thus eliminating back-and-forth movements of the wheel base.
- Ball bearing mechanisms ensure smooth transitions and effortless maneuverability in every position.
- A set of 5 in. double casters provide superior ease of maneuverability.
- Integrated expandable frame, allows mattress deck to be extended without using any tools from 80 in. to 84 in. to 88 in.
- A patent pending lift system enables heavy loads to be lifted from a very low height.
- A four caster central braking system allows bed height adjustments even when the casters are locked.
- Elevated side rails equipped with ergonomic handles provide additional safety even when using thicker care mattresses.
- Frame integrated receptacle for the trapeze bar.
- Integrated scale option does not affect the 8 in. low-profile feature.
- Unique design provides a clearance of 6 in. x 42 in. (low-profile bed), thereby allowing wheeled equipments to be positioned underneath the bed.



Photos are for reference only and are subject to change without prior notice.

Patient control



Nurse control



Extendable platform (without using any tools) Mechanical CPR function (optional)





There are numerous features and options available. Our bed can be customized to meet the specific conditions in each sector of your institution.

# **DETAILED TECHNICAL DATA**

DEINILED IECHNIC	AL VAIA	1.	10
Central brake system	1 pedal at the foot section	•	
	1 pedal at the foot section and 1 pedal at the head section		•
	Side pedal on each side of the bed *1		•
	5 in. double	•	
Caster	5 in. double anti static		•
Head board and foot board	Composite	•	
Side rails	Increased protection (RDRTG2 – 28 x 14)		
	1 basic remote control	•	
D	1 remote control with auto contour feature		•
Patient control	2 remote controls with auto contour feature		•
	Controls integrated into head side rails		•
	Basic (auto-contour included)	•	
Controls integrated into	Complete (Trendelenburg included, outer side)		•
the head side rails *3	Light option *4		•
	Nurse call option *4		•
	Light and nurse call option *4		•
	Integrated into the foot board	•	
Nurse control	With light, electrical CPR, chair position and complete locking function *4		•
Drainage bag holders	Two per side	•	
Battery back-up		•	
Balkan holder		•	
Bumpers at the head section		•	
C	2 (behind the head board)	•	
Support for IV poles	2 (behind the foot board)		•
Trapeze holder		•	
Mechanical CPR	1 handle (right side)		•
Mechanical Crk	2 handles		•
Backrest angle indicator	crest angle indicator One per side		•
16 openings for restraint straps		•	
Mattress retainer	Foot	•	
	Side		•
Bed extension	80 in. to 84 in. to 88 in. (no tools required)	•	
Caster covers			•
Composite platform		•	

## **SPECIFICATIONS**

Mattress deck width	36 in.
Mattress deck length	80 in. to 84 in. to 88 in.
Minimum height	8 5/16 in.
Maximum height	32 in.
Load capacity	600 lb.
Backrest angle	~65°
Footrest angle	~34°
Trendelenburg position	~12°
Under bed clearance	6 in.

## **OPTIONAL ACCESSORIES**

Integrated bed exit alarm
IV pole
5th wheel *2
Integrated scale
Integrated scale with a bed exit alarm
Bar with trapeze
Night light (LED)
Nurse call with DB-37 *4
Nurse call with ¼ in. cable *4
Bed trolley

# **WARRANTY INFORMATION**

Frame	10 years
Electric motors	2 years
Remote controls and electronic components	2 years
Accessories	l year

CSA certified to Canadian and U.S. standards 60601-1

60601-1 Amendment 2

60601-2-38-03 and others

Complies with Health Canada and FDA recommendations regarding entrapment hazards.

Specifications are subject to change without prior notice.

- \*1 Raises minimum bed height to 12 in.
- \*2 Requires a central brake system with side pedals (on each side), raising the minimum bed height to 15 in.
- Requires the following option: Patient control, integrated into side rails.
- \*4 Certain conditions required.



# The Versatech combines high performance with ease of use."



# Major advantages:


- Fall prevention 8 in. low-profile bed.
- Ultra-silent DC motors. The quietest on the market, helps maintain a calm and relax environment.
  - Bed length extension without using any tools, from 80 in. to 84 in. to 88 in.
- Superior finish with great attention to details.
- Maintenance friendly with quick connect components.
- Light weight head and foot boards for ease of use.
- CSA certified to Canadian and U.S. standards, as are all Rotec beds.









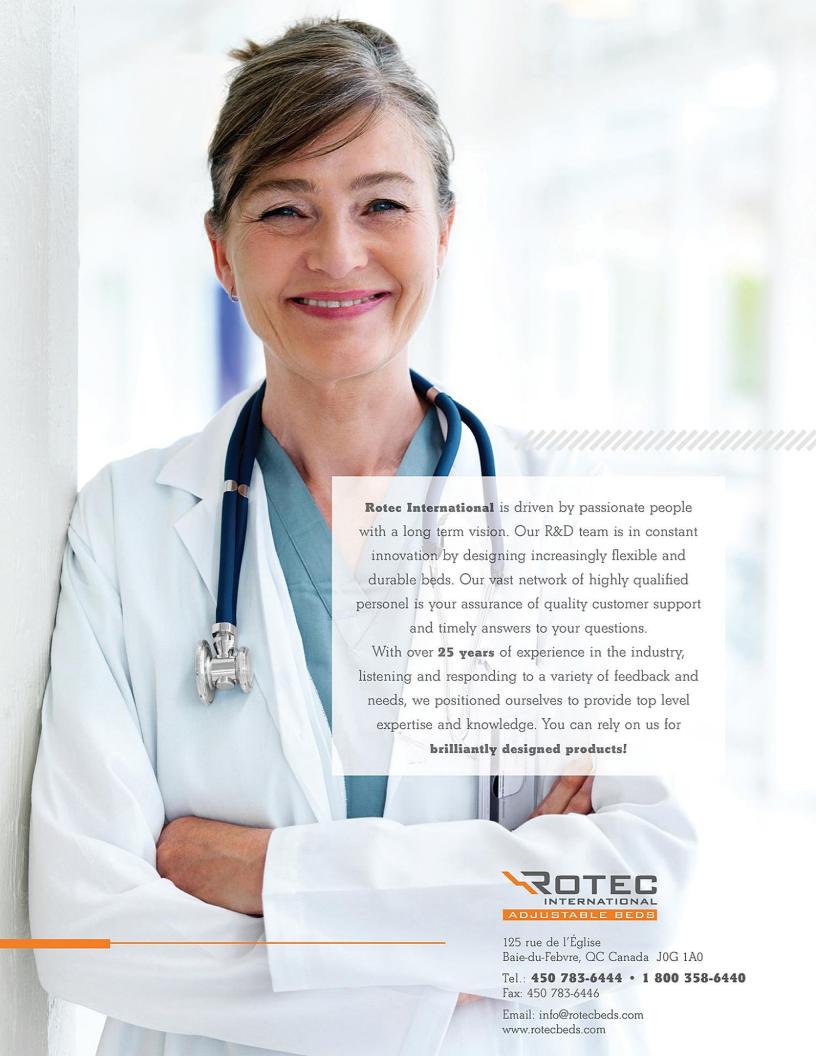

# Versatech 1100 Bariatric Low Bed



- Ultra silent DC motors. The quietest on the market, helps maintain a calm and relax environment.
- **Light** weight head and foot boards for ease of use.
- Maintenance friendly with quick connect components.
- CSA certified to Canadian and US standards.











8 in. low-profile

Width extension

Length extension

Chair position

There are numerous features and options available. Our bed can be customized to meet the specific conditions in each sector of your institution.

## **DETAILED TECHNICAL DATA**

DETAILED TECHNIC	AL DATA	1	
Central brake system	1 pedal at the foot section	•	
Caster	5 in. double	•	
	5 in. double anti static		•
Head board and foot board	Composite	•	
Side rails	Increased protection (RDRTG2 – 28 x 14)	•	
	1 basic remote control	•	
	1 remote control with auto contour feature		•
Patient controls	2 remote controls with auto contour feature		•
	Controls integrated into head side rails		•
	Basic (auto-contour included)	•	
Controls integrated into the	Complete (Trendelenburg included, outer side)		•
head side rails *1	Light option *2		•
	Nurse call option *2		•
	Light and nurse call option *2		•
	Integrated into the foot board	•	
Nurse control	With light, electrical CPR, chair position and complete locking function *2		•
Drainage bag holders	Two per side	•	
Battery back-up		•	
Balkan holder		•	
Bumpers at the head section		•	
Support for IV poles	2 (behind the head board)	•	
Trapeze holder		•	
Backrest angle indicator	One per side		•
16 openings for restraint straps		•	
Mattress retainer	Foot	•	
	Side		•
Bed extension	80 in. to 84 in. to 88 in. (no tools required)	•	
Caster covers			•
Composite platform		•	

## **SPECIFICATIONS**

Mattress deck width	36 in. to 54 in.
Mattress deck length	80 in. to 84 in. to 88 in.
Minimum height	8 <sup>5</sup> /16 in.
Maximum height	32 in.
Load capacity	1100 lb.
Backrest angle	~65°
Footrest angle	~34°
Trendelenburg position	~12°
Under bed clearance	6 in.

## **OPTIONAL ACCESSORIES**

Integrated bed exit alarm	
IV pole	
Integrated scale	
Integrated scale with a bed exit alarm	
Bar with trapeze	
Night light (LED)	
Nurse call with DB-37 *2	
Nurse call with $\frac{1}{4}$ in. cable *2	
Bed trolley	

## **WARRANTY INFORMATION**

Frame	10 years
Electric motors	2 years
Remote controls and electronic components	2 years
Accessories	1 year

CSA certified to Canadian and U.S. standards 60601-1

60601-1 Amendment 2

60601-2-38-03 and others

Complies with Health Canada and FDA recommendations regarding entrapment hazards.

Specifications are subject to change without prior notice.

\*1 Requires the following option: Patient control, integrated into side rails.



